Anwendung/Application :

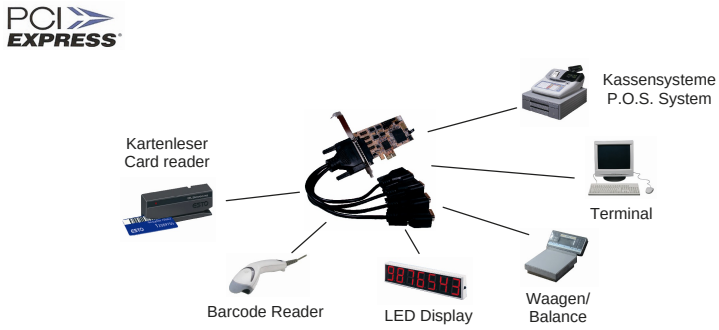

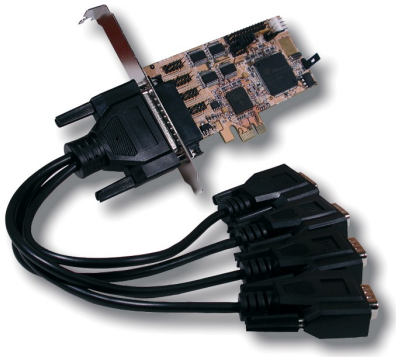

Operating System (OS):

Geprüft/Approved:

WEEE Reg.Nr.: DE97424562

Verpackung/Packing:

4S Serielle RS-232 PCI-Express Karte

Beschreibung :	• Die EX-44093 PCI Express I/O Karte stellt vier Serielle RS-232 High Performance UART 16C950 Ausgänge zur Verfügung. Er ist entwickelt worden um vier weitere Serielle Ausgänge für PC, kleine Workstation oder Server über den PCI Express Bus zu erweitern. • +5V und +12V auf einen Pin der 9 Pin Stecker konfigurierbar POS System (Power over System).
Merkmale :	• Schnittstelle: RS-232 V.24 • FIFO Buffer: 16C950 mit 128Byte • I/O Adressen: wird vom Betriebs System vergeben • Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing • Daten Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: none, even, odd, space, mark • Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND • PCI Express Schnittstelle kompatibel zu 1.0a Spezifikation
Chip-Set :	• Oxford OX16PCI954
Datentransfer-Rate :	• 50 Baud bis 921.6KBaud
Anschlüsse :	• 4 x 9 Pin D-SUB Seriell Stecker (mit Octopus Kabel) • 1 x 5/12V Stecker für Anschluss vom Rechner Netzteil
Hardwaresysteme :	• PCI Express Slot x1 bis x16
Betriebstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C (32 bis 131^{0}F) • 5 bis 95%
Abmessung / Gewicht :	• 120 x 66 mm / 150g
Lieferumfang :	• EX-44093, 1 x Octopus Kabel mit 4 x 9 Pin Seriell Stecker, Treiber CD, Handbuch

4S Serial RS-232 PCI-Express card

Description :	• The EX-44093 PCI Express I/O adapter provides 4 high performance 16C950-type UART compatible RS-232 serial ports. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI Express Bus (PCIE). • The card is fully PCI Express Plug-and-Play compatible and no IRQ and I/O address conflict problems. • Provides +5V and +12V over the 9 pin connector POS System (Power over System)
Feature :	• Interface: RS-232 V.24 • FIFO Buffer: 16C950 with 128Byte • I/O addresses: Setting from the operating system • Interrupt: Setting from the System BIOS with Interrupt Sharing • PCI Express Interface: Fully compliant with PCI-Express Base Specification Revision 1.0a • Data Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: None, even, odd, space, mark • Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip-Set :	• Oxford 16954
Data transfer rate :	• 50Baud to 921.6KBaud
Connectors :	• 4 x 9 pin D-SUB serial connector (with Octopus cable) • 5/12V Power connector for take the power from the power supply of computer case
Hardware system :	• 1 x PCI Express Slot x1 to x16
Operating Temperature : Humidity :	• 0 to 55^{0}C (32 to 131^{0}F) • 5 to 95%
Size / Weight :	• 120 x 66 mm / 200g
Packaging contents :	• EX-44093, 1 x Octopus cable with 4 x 9 pin male connector, Driver CD, Manual